

# BRT-801


BRT-801

## Black Hip & Ridge Sealing Tape

BRT-801 is a black, U.V. resistance hip and ridge sealant for under tile and roof applications. BRT-801 has an aggressive grip, stays flexible during application, assuring immediate sealing on contact, and superior long-term adhesion. Providing leakproof results, this butyl adhesive/sealant is asphalt and solvent free. BRT-801 is also reversed-rolled for easy, fast application.

### TECHNICAL DATA

Appearance	Black, Non-Gloss, Polyethylene Tape
Bonding Time	Immediate Water Tight Aggressive Grip (Full bond within 24 hours)
Thickness	.30 mils
Backing	High Density, U.V. Resistant Polyethylene
Adhesive	THE GRAY MATTER™ Elastomeric Modified Butyl Rubber
Operating Temperature	-20°F to 200°F
Low Temperature Flexibility	Passes, no cracking
Tensile Strength	.445 psi avg.
Peel Strength	.17 lbs. per linear inch
Water Resistance	Excellent (Surface must be clean and dry before application)
U.V. Resistance	Excellent

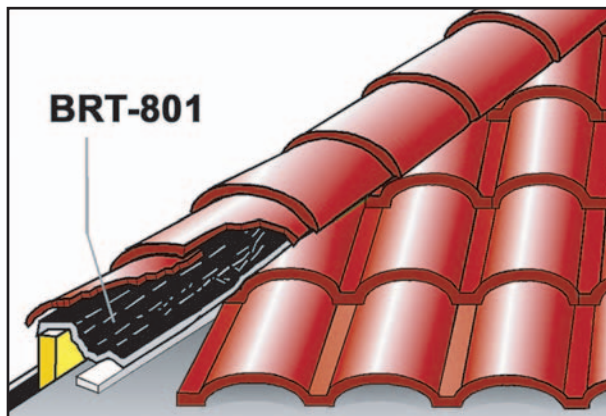

### BRT-801 PART NUMBERS

1 Case w/ (8) 6" x 50' Rolls	304185
1 Case w/ (6) 9" x 50' Rolls	304186
1 Case w/ (6) 12" x 50' Rolls	304181

### APPLICATION

Preparation	Clean surface - Remove dust, dirt, oil and moisture. Peel off few inches of release liner.
Method	Apply exactly the first time, removal may damage tape and roof. Center tape on ridge board. First guide tape to lowest part of tile or shingle. <b>DO NOT STRETCH.</b> Press down firmly starting at lowest or most outside edge workin back toward center of tape, removing bubbles. Edges must have no openings, tunnels, fishmouths.
Temperature	.35°F to 110°F

### STORAGE

Temperature	.30°F to 110°F
Shelf Life	.24 Months (Unopened)
Flammability	.Non-flammable (Contains no Asbestos, CFC or PCB)

### PRECAUTIONS

Surfaces must be clean and free of moisture and contamination. Do not apply this product where temperatures will exceed 200°F. Do not stretch this product during application. Keep out of the reach of children. Review MSDS for safety information prior to use. **DO NOT** use where acidic or alkaline chemicals are present (ie., lab fume hood, vents, etc.)

For Industrial Professional Use Only.



Carlisle Coatings & Waterproofing Incorporated  
900 Hensley Lane  
Wylie, Texas 75098  
Phone: (800) 527-7092 FAX: (972) 442-0076  
www.hardcast.com