

CRT-1602


CRT-1602

Coating-Ready Seam Sealing Tape

CRT-1602 is a polyester fabric-backed seam sealing tape for sealing seams on metal roofs before coating. CRT-1602 has an aggressive grip, stays flexible during application, assuring immediate sealing on contact, and superior long-term adhesion. It also provides up to 50% savings over traditional metal seam sealing costs. CRT-1602's pressure sensitive properties allow a fast, clean and easy application.

TECHNICAL DATA

Appearance	Grayish-White Fabric
Bonding Time	Immediate Water Tight Aggressive Grip (Full bond within 24 hours)
Thickness	.25 mils
Backing	DuPont Sontara® Fabric
Adhesive	THE GRAY MATTER™ Elastomeric Modified Butyl Rubber
Operating Temperature	-20°F to 200°F
Low Temperature Flexibility	Passes, no cracking
Tensile Strength	.790 psi avg.
Peel Strength	.17 lbs. per linear inch
Water Resistance	Excellent (Surface must be clean and dry before application)
Fluid Absorbtion	Excellent for coatings (Fabric made of wood pulp and spun polyester)

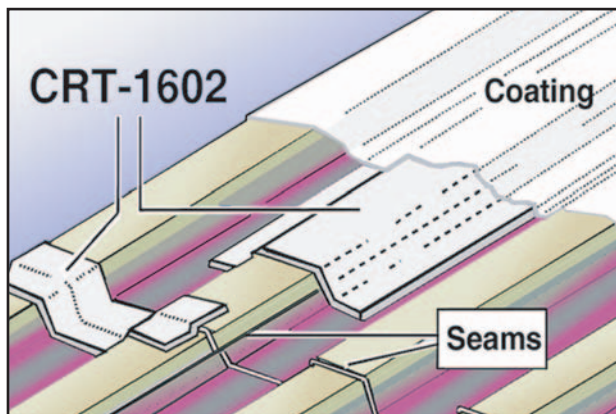

CRT-1602 PART NUMBERS

1 Case w/ (24) 2" x 50' Rolls	304086
1 Case w/ (16) 3" x 50' Rolls	304087
1 Case w/ (12) 4" x 50' Rolls	304088
1 Case w/ (8) 6" x 50' Rolls	300489

APPLICATION

Preparation	Clean surface - Remove dust, dirt, oil and moisture. Peel off few inches of release liner.
Method	Apply exactly the first time, attempt to remove may damage tape and roofing. DO NOT STRETCH. Press down firmly starting at center and working back toward outside edge, removing bubbles. Edges must have no tunnels, openings, or fishmouths.
Temperature	.35°F to 110°F

STORAGE

Temperature	.30°F to 110°F
Shelf Life	.24 Months
Flammability	.Non-flammable (Contains no Asbestos, CFC or PCB)

PRECAUTIONS

Surfaces must be clean and free of moisture and contamination. For exposed areas, must coat with elastomeric coating or equivalent. Do not apply this product where temperatures will exceed 200°F. Do not stretch this product during application. Keep out of the reach of children. Review MSDS for safety information prior to use. DO NOT use where acidic or alkaline chemicals are present (ie., lab fume hood, vents, etc.)

For Industrial Professional Use Only.



Carlisle Coatings & Waterproofing Incorporated
900 Hensley Lane
Wylie, Texas 75098
Phone: (800) 527-7092 FAX: (972) 442-0076
www.hardcast.com