



# TPO-2265

## Weather Resistant Seam Sealing Tape

with THE GRAY MATTER™ Enhanced Formula  
Butyl Adhesive / Sealant

- TPO Rubber Backing with Proven Exterior Performance
- Excellent for Seams
- Aggressive Grip & Adhesion
- Ideal Adhesive/Sealant Thickness
- Immediate Leak-proof Results
- Improved Butyl Adhesive/Sealant
- Easy, Fast Application
- Stays Flexible

### TECHNICAL DATA

<b>Appearance</b> .....	Gray adhesive/sealant
<b>Backing</b> .....	White (non-gloss)
<b>Sealant Material</b> .....	Elastomeric Modified Butyl Rubber THE GRAY MATTER™
<b>Thickness</b> .....	22 mils
<b>Peel Strength</b> .....	17 lbs. per linear inch
<b>Tensile Strength</b> .....	680 psi avg. ASTM D 822
<b>Elongation</b> .....	900% avg. ASTM D 822
<b>Flexibility (low temp.)</b> .....	Passes, no cracking
<b>Bonding Time</b> .....	Immediate, water tight aggressive grip. Full bond within 24 hours.
<b>Service Temperature</b> .....	-40°F. to 220°F.
<b>Water Resistance</b> .....	Excellent. Surface must be clean and dry before application
<b>U.V. Resistance</b> .....	Excellent
<b>Packaging</b> .....	75 ft. rolls in 2, 3, 4, 6, inch widths.

### TPO-2265

#### PART NUMBERS


1 Case w/ (24) 2" x 75' Rolls .....	310684
1 Case w/ (16) 3" x 75' Rolls .....	310685
1 Case w/ (12) 4" x 75' Rolls .....	310686
1 Case w/ (8) 6" x 75' Rolls .....	310687

### APPLICATION

<b>Temperature</b> .....	32°F. to 110°F. (1.7°C. to 44°C.)
<b>Method</b> .....	Cut desired length, peel off release liner, and apply. Removal or repositioning may damage TPO-2265 and surface. Overlap at ends. Rub down with heavy pressure to assure complete contact.
<b>Preparation</b> .....	Surface must be clean and dry, oil and grease free.
<b>Clean Up</b> .....	UN-TACK™ or Solvent (Use safe handling practices.)
<b>Painting</b> .....	Use paint appropriate for aluminum.

### STORAGE

<b>Temperature</b> .....	35°F. to 110°F. (1.7°C. to 44°C.)
<b>Shelf Life</b> .....	12 months

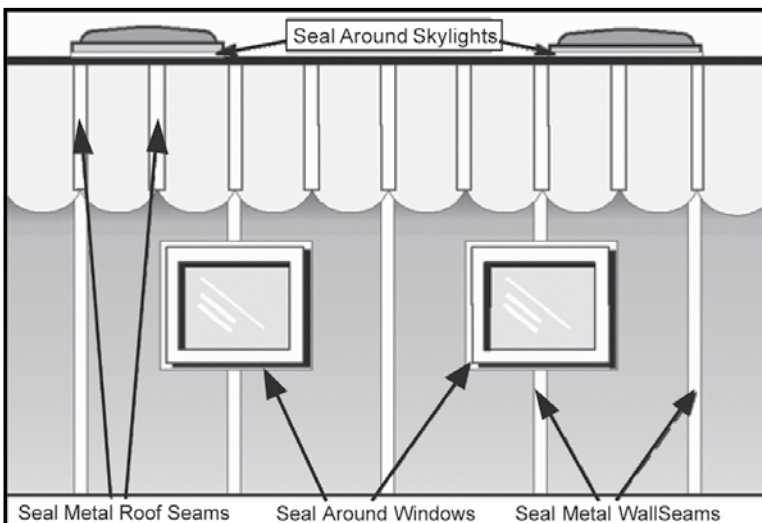

### PRECAUTIONS

Surfaces must be clean and free of moisture and contamination. Keep out of the reach of children. Review MSDS for safety information prior to use.

**For Industrial Professional Use Only.**

For additional information contact:



Carlisle Coatings & Waterproofing  
Incorporated

900 Hensley Lane  
Wylie, Texas 75098

Phone: (800) 527-7092 FAX: (972) 442-0076

www.hardcast.com