

GRIPPLE® Trapeze Fastener System

[Part #317655]



APPLICATION

Purpose made single-channel Gripple for quick and easy suspension and adjustment of pre-fabricated units in a single or multi-tiered configuration. Works in conjunction with strut to support services such as rectangular ductwork.

PRODUCT FEATURES

- To be used in conjunction with Gripple No.3 cable hanger systems
- Kit comprises length of cable with pre-attached end fixing and Trapeze Fastener
- Suitable for low-void ceilings
- Releasable pin for easy height adjustment
- SMACNA verified

SAFE WORKING LOAD


The No.3 Trapeze Fastener System has a maximum Safe Working Load of 200 lbs with a 4:1 safety factor.

Code	Size	Maximum SWL
HF-BRACKET-TPZ-US	No. 3	200 lbs


SPECIFICATIONS

Manufactured from Type ZA2 zinc with a stainless steel spring.


A (in.)	B (in.)	C (in.)
1/4"	1 1/4"	1 1/2"

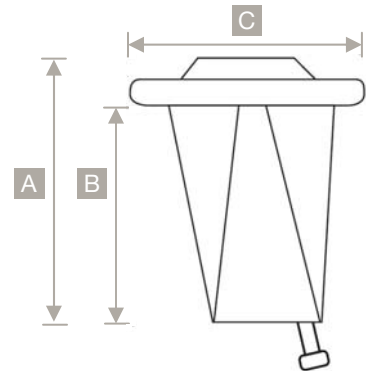

INSTALLATION

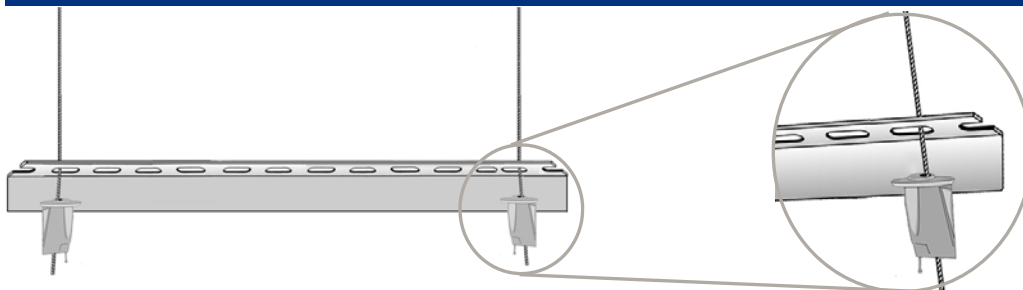

Unscrew pin and remove when installation and height adjustment are complete



Carlisle HVAC Products 900 Hensley Lane Wylie, TX 75098

Toll Free: (800) 527-7092 Customer Service: (888) 229-0199 Fax: (972) 442-0076

www.hardcast.com

Gripple Trapeze Fastener TDS: 10.09 - 602041